


ARCHISPOT Fixed

ASFIX6W60-B-3K
SAP CODE: 2001817

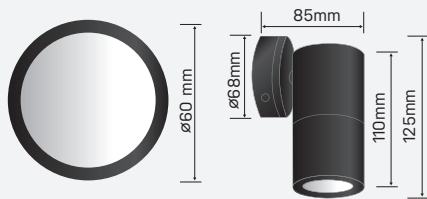


6 Watt fixed LED pillar style wall light

ARCHISPOT Fixed is tubular aluminium wall light with a replaceable GU10 LED lamp.



Photometric Diagram



Unit: cd
 - C0/180 35.0deg
 - C90/270 35.0deg

KEY INFORMATION

Lumen Output	420lm
Input Power	6W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	BLACK
Warranty	3yr Fitting 1yr Lamp
IP Rating	IP65

PHOTOMETRIC

Efficacy	70lm/W
LED	SMD
CCT	3000K
Beam Angle	35°

ELECTRICAL


Driver	N/A
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	N/A
Power Factor	>0.9
LED Input Current (nominal)	N/A
Useful life @Ta25° (L70)	30,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Connection Type	Terminal Block
Total Weight	0.40kg
Dimensions	68 x 85 x 125mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 1

ARCHISPOT Fixed

ASFIX6W60-S-3K
SAP CODE: 2001477

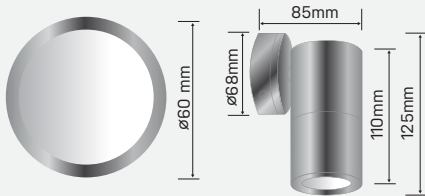


6 Watt fixed LED pillar style wall light

ARCHISPOT Fixed is tubular aluminium wall light with a replaceable GU10 LED bulb.



Photometric Diagram



Unit: cd
 - C0/180 35.0deg
 - C90/270 35.0deg

KEY INFORMATION

Lumen Output	420lm
Input Power	6W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	SILVER
Warranty	3yr
IP Rating	IP65
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	70lm/W
LED	SMD
CCT	3000K
CRI	>80
Beam Angle	35°

ELECTRICAL

Driver	N/A
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	N/A
Power Factor	>0.9
LED Input Current (nominal)	N/A
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block
Total Weight	1kg
Dimensions	Ø68 x 85 x 125mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 1