


WALL WASHER

W12W150*90RE6KB

SAP CODE: 2000554

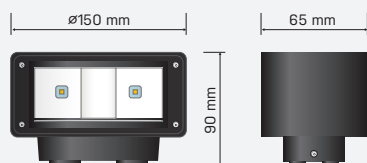


Black, 6000K, 12W,
indoor/outdoor, LED
wall washer

An LED up/down wall light for
protected outdoor use.



Photometric
Diagram

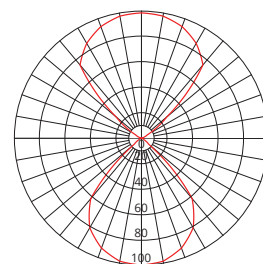

Unit: cd
- C0/180 85.0deg
- C90/270 85.0deg

KEY INFORMATION

Lumen Output	420lm
Input Power	12W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	BLACK
Warranty	3yr
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	35lm/W
LED	SMD
CCT	6000K
CRI	>65
Beam Angle	90°

ELECTRICAL


Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	31VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA12
Total Weight	0.8kg
Dimensions	150x90x65mm
Operating Ambient Temp.	-25 to 50°C
Electrical Classification	Class 1

WALL WASHER

W12W150*90RE6KW
SAP CODE: 2000555

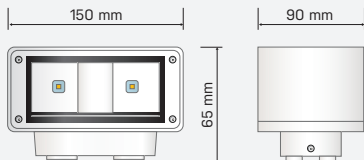


White, 6000K, 12W, indoor/outdoor, LED wall washer

An LED up/down wall light for protected outdoor use.



Photometric Diagram

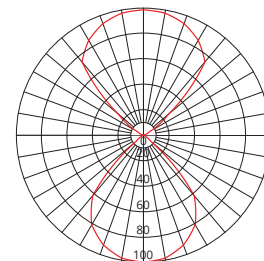

Unit: cd
- C0/180 85.0deg
- C90/270 85.0deg

KEY INFORMATION

Lumen Output	420lm
Input Power	12W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	3yr
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	35lm/W
LED	SMD
CCT	6000K
CRI	>65
Beam Angle	90°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	31VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA12
Total Weight	0.8kg
Dimensions	150x90x65mm
Operating Ambient Temp.	-25 to 50°C
Electrical Classification	Class 1